

# EQUALIZER PLUNGER



Info@kaizenws.com

1-877-369-8886


The Equalizer Plunger is designed for wells that require short duration shut in times, high daily cycle counts, paraffin control and high liquid volumes. This innovative design allows the plunger to fall against moderate flow rates. Unique design makes the plunger adaptable to all standard lubricator designs.

## APPLICATIONS


Equalizer plungers are typically used in wells that can maintain a flowing gas rate less than 75% of well head critical rate or wells requiring short closed time.

Recommended range 30-75% Critical Rate

Static fall speed 300 meters per minute

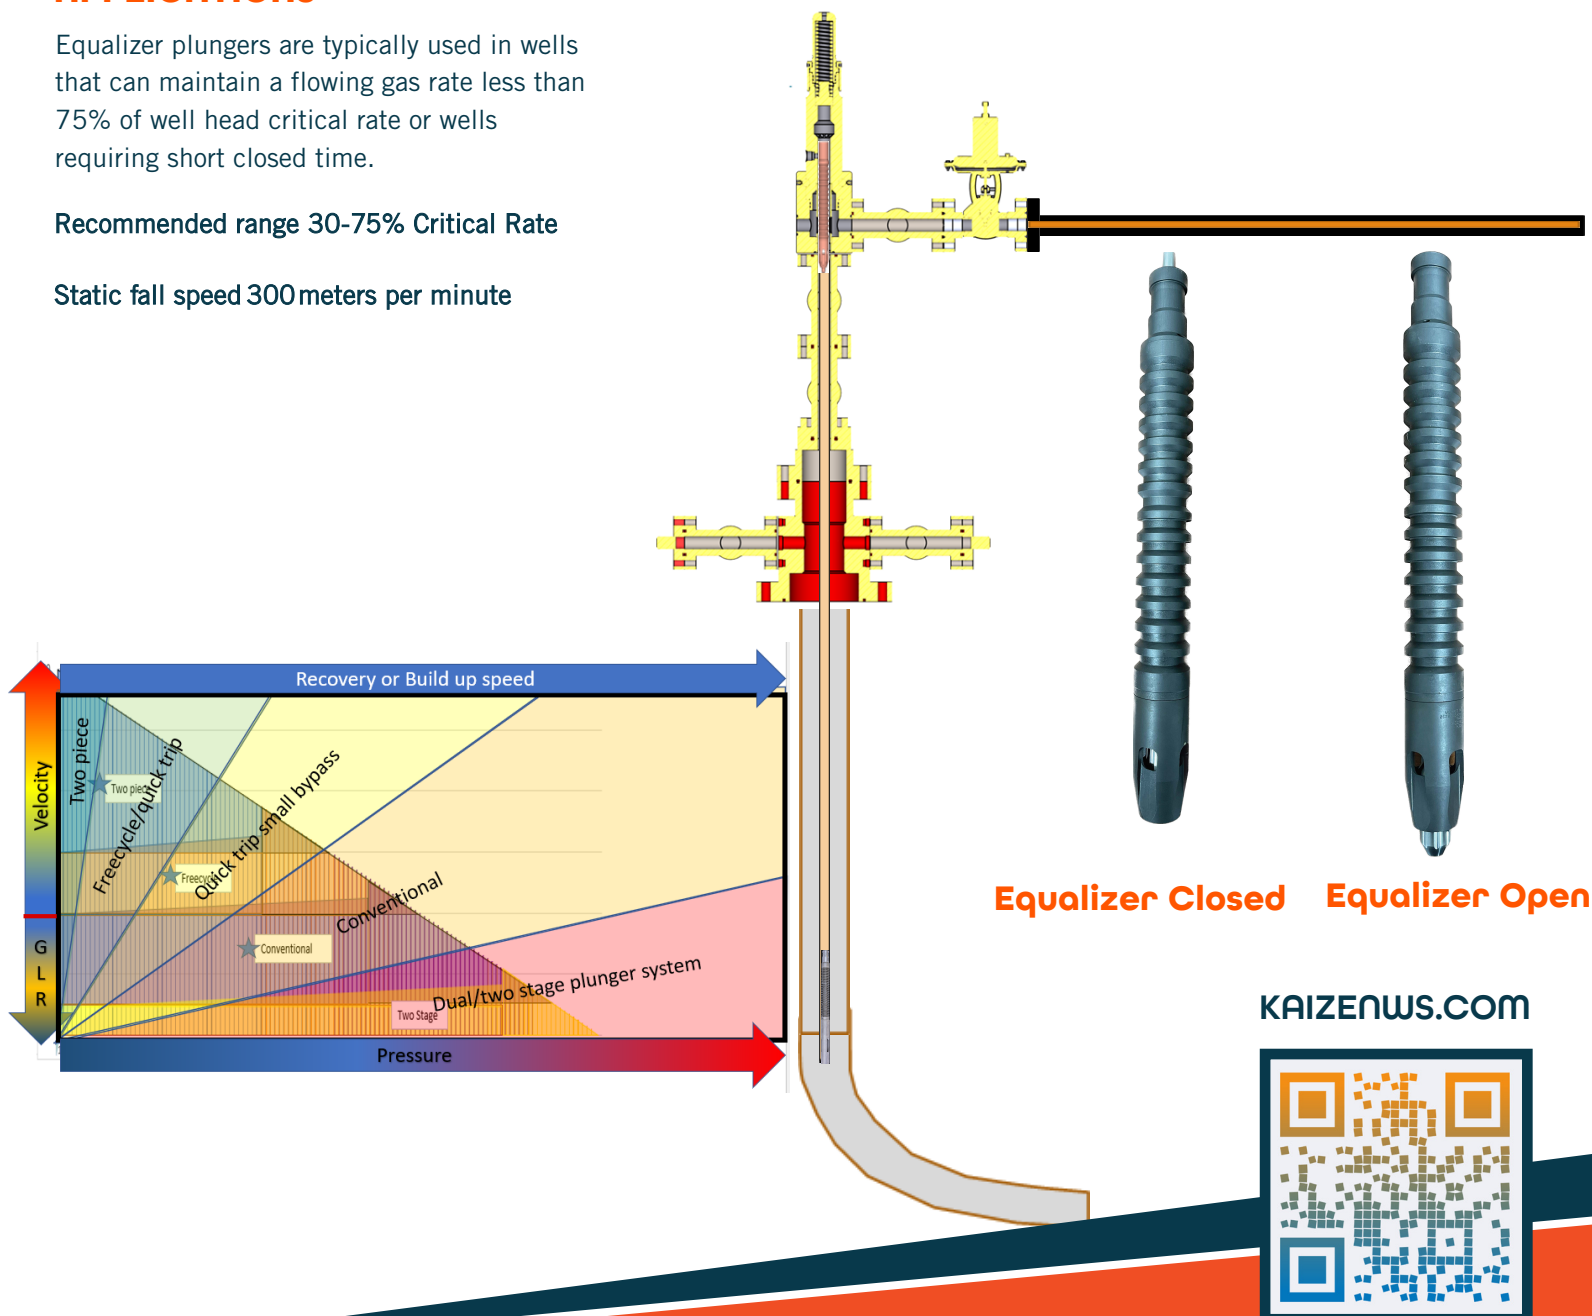

KAIZENWS.COM

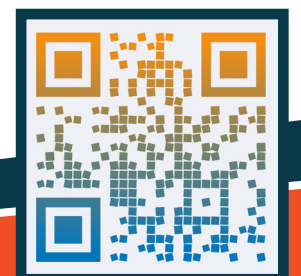

## DESIGN

- The Equalizer Plunger is a quick trip plunger that uses an internal valve to allow a large flow bypass area
- This high-quality plunger is built from high strength 4140 material and can be used in sweet and NACE sour service applications
- The Equalizer Plunger can be nickel coated for extreme environments to extend wear life and minimize corrosion
- Works in all standard lubricators designs
- Does not require external trip rod and anvil
- Available in 60.3mm, 73mm and 88.9mm size

## ADDED FEATURES

- High sand resistance due to a valve design and flow path allowing plunger to self clean in most applications
- The valve clutch is designed to last the life of the plunger unlike other plungers in the market
- The valve clutch will not become soft or weak as the valve is shifted during standard operation

## KAIZEN EQUALIZER PLUNGER

